



BRAND

Juno Lighting

DESCRIPTION

4 Inch 600 Lumen 120 Volt Generation 4 LED IC Remodel Housing features an integral light engine and shallow housing which allows for fit in 2 x 6 construction. IC designation allows for housing to be in direct contact with insulation. Installs through an opening in the ceiling from below. Fully sealed housing stops infiltration and exfiltration of air reducing heating and air cooling costs without the use of additional gaskets. Replaceable light engine mounts directly to housing and incorporates the latest generation high lumen output LED array. Computer optimized reflector design with high reflectance finish coupled with a high transmission diffusing lens conceals the LEDs and produces uniform aperture luminance. Comparable light output to 65 watt incandescent while consuming less than 12 watts. 2700K, 3000K, 3500K, 4100K color temperatures available, 90 minimum CRI. 120 volt only driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers (see attached manufacturer dimmer compatibility reference). Life rated for 50,000 hours at 70 percent lumen maintenance. Title 24 compliant with select trims. UL listed for damp locations. 5 year limited warranty. 14.1 inch length x 7.4 inch width x 4.4 inch height. A complete fixture includes a housing and trim, sold separately.





Shown in: Aluminum

TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	12W
DIMMER	Dimmable
DIMENSIONS	14.1"L x 7.4"W x 4.4"H
INTEGRATED LED MODULE	
LAMP	1 x LED/12W/120V LED

Technical Information

LUMINOUS FLUX	600 lumens
LUMENS/WATT	50.00
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
LAMP LIFE	50000 hours
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel IC

SPEC #	JUN110978
--------	-----------

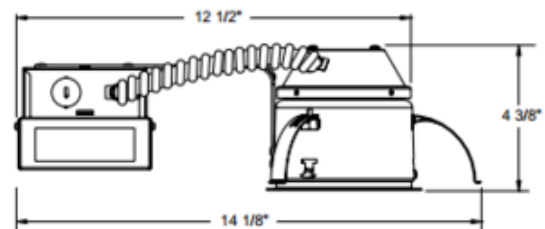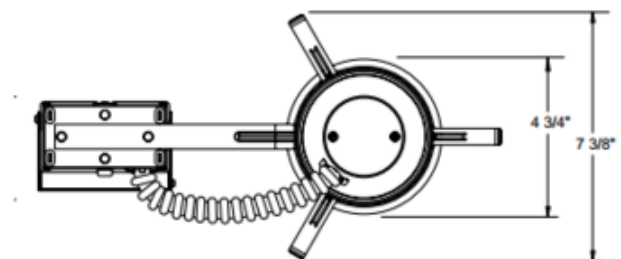

4 3/8" CEILING CUTOUT

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE