

1718 W. Fullerton Ave Chicago, IL 60614 Tel: 773-770-1195 Fax: 773-935-5613 www.edgelighting.com info@edgelighting.com M-NAU-3-_ M2-NAU-3-_ FJ-NAU-3-_






Installation Instructions for Nautilus LED


IMPORTANT INFORMATION

- This product is ETL listed for indoor dry locations.
- The product is intended to be used with Edge Lighting Monorail & Fast Jack Systems.


SAVE THESE INSTRUCTIONS!




Install the fixture to the Monorail (MC-FJ-_)

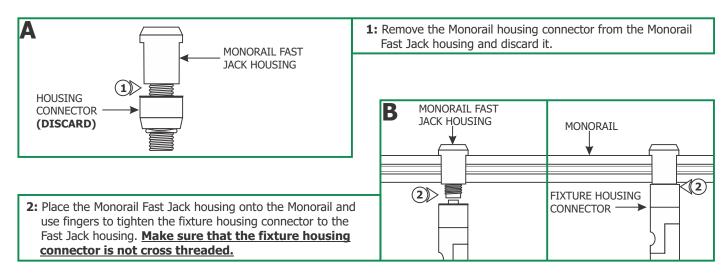

Install the fixture to Monorail 2 Circuit Connector (M2C-FJ-_)

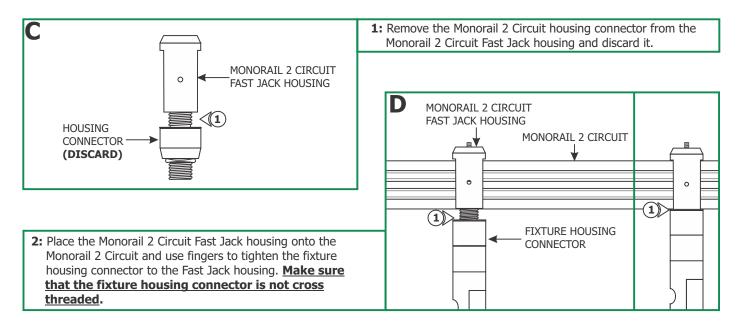

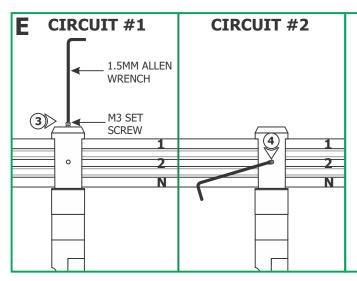



- **3:** To power the fixture from circuit #1, top and bottom (neutral) rails, tighten the M3 set screw on top of the housing with the 1.5mm Allen wrench. **Make sure this set screw connection is very tight.**
- **4:** To power the fixture from circuit #2, middle and bottom (neutral) rails, remove the M3 set screw from top of the housing and tighten it into the side threaded hole with the 1.5mm Allen wrench. **Make sure this set screw connection is very tight.**

NOTE: To avoid shorting the system, do not use more than one set screw to select a circuit on the Monorail 2 Circuit connector.

NOTE: Do not load either circuit over the maximum system rating.

Install the Fixture to Fast Jack LED Canopy (FJP-2SQ-LED_, FJP-4SQ-LED_, FJP-4RD-LED_)

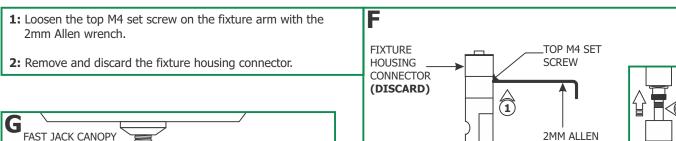



3: Use fingers to tighten the Fast Jack fixture connector into the Fast Jack canopy connector.

WRENCH

- **4:** Tighten the top M4 set screw with the 2mm Allen wrench to secure the fixture in place.
- **5:** Rotate the fixture head to properly wash the wall with light.

NOTE: The Nautilus consumes **34.8** watts and contains integrated LED lamps which are rated for 50,000 hours.

