



BRAND

Juno Lighting

DESCRIPTION

All-in-one 6 inch LED retrofit downlight trim installs into existing 6 inch incandescent housings with medium base sockets or Juno IC23-LEDT24 and IC23R-LEDT24 quick connect recessed housings. May be used in housings completely covered with insulation. Available in White trim with White or Black baffle. Also available in White trim with Clear, White, Haze or Wheat Haze reflector. Selection of interchangeable baffle and cone trim inserts can be changed in the field to customize the look of the product. Aluminum housing with white painted flange as standard. LED light engine mounts directly to trim. LED array integrated to one piece thermally conductive housing and light engine incorporates the latest generation high lumen output LED array. Available in 2700K, 3000K, 3500K, or 4100K color temperature, 83 CRI. Comparable light output to 65 watt BR30 incandescent while consuming less than 11 watts. Dedicated 120 volt driver. Dimmable with most standard or electronic low voltage dimmers. Life rated for 50,000 hours at 70 percent lumen maintenance. UL listed. Suitable for wet locations. 7.6 inch outside diameter x 5.6 inside diameter x 4.75 inch height.




White Baffle

TRIM COLOR	N/A
BODY FINISH	White/ White Baffle
WATTAGE	11W
DIMMER	Dimmable
DIMENSIONS	6"W
INTEGRATED LED MODULE	
LAMP	1 x LED/11W/120V LED

Technical Information

LUMINOUS FLUX	600 lumens
LUMENS/WATT	54.55
LAMP COLOR	2700K
FUNCTION	Downlight
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Retro kit
APERTURE SHAPE	Round

SPEC #	JUN111111
--------	-----------

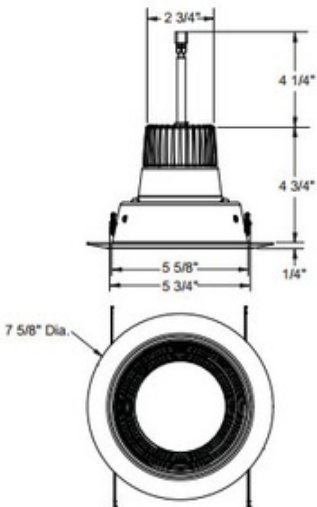

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE