





BRAND PureEdge Lighting

DESCRIPTION

The Glide Glass Linear Suspension features a direct 1 inch D1 flat lens with 100 degree beam spread. Glass available in Mirror in a 48 inch length with matching canopy. Cables and hardware have a Satin Nickel finish. At 7 watts per foot, the 24 volt AC suspension contains 2700K color temperature LEDs, 92+ CRI, delivering 33 lumens per watt/230 lumens per foot. 50,000 hour average lamp life. Comes with 12 feet of cable that is field adjustable with Grip Jack Connector. Includes a 26 inch rectangle canopy and feeds power at the center from a 24 VAC Class 2 electronic low voltage LED transformer. Includes LED transformer which fits inside a standard 4 inch electrical box with round plaster ring. Dimmable with an electronic low voltage dimmer (tested and approved Lutron Diva DVELV-300P or Lutron Skylark SELV-300P), sold separately. Major components made and assembled in the USA. ETL listed. Fixture is covered by a 5 year warranty. Limited Quantities Available.

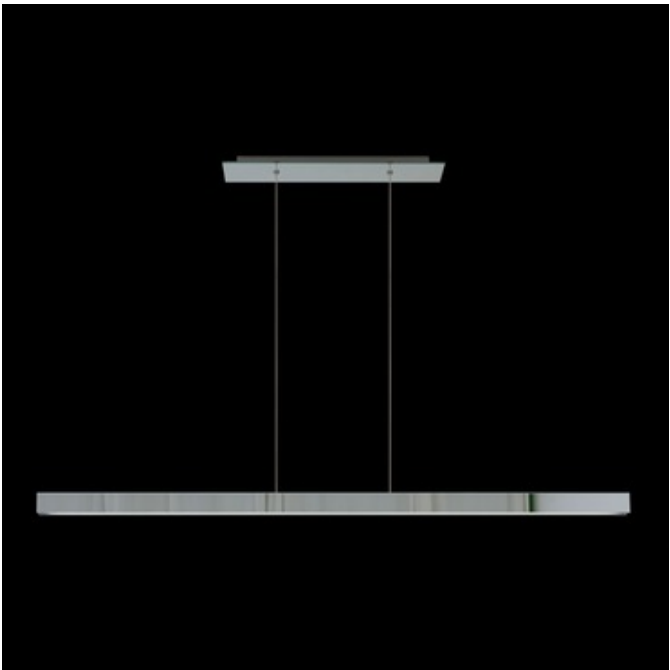

SHADE COLOR	Mirror
BODY FINISH	Satin Nickel
WATTAGE	35W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 1.4"W x 2"H
INTEGRATED LED MODULE	
LAMP	1 x LED/35W/24V LED
Technical Information	
LUMINOUS FLUX	1155 lumens
LUMENS/WATT	33.00
LAMP COLOR	3000K
COLOR RENDERING	92 CRI
BEAM ANGLE	100°
SPEC #	EDG157093

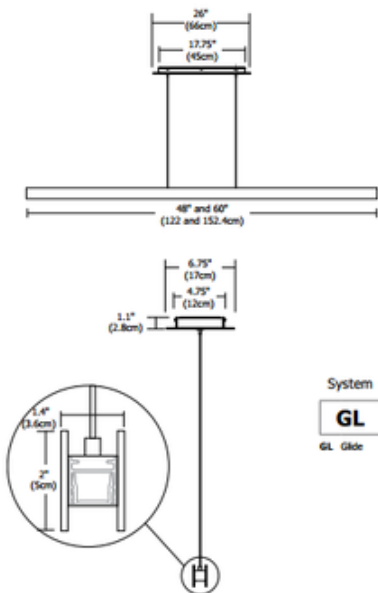

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE