



BRAND Bartco Lighting Co.


DESCRIPTION

T5 HO low profile linear fluorescent architectural fixture with rotational locking lamp holders. High power factor ballast is pre-wired to lamp holders. Corrosion-resistant 20 gauge steel fully assembled housing. High reflectance white powder-coat finish. Available options are dimming ballast, damp location, custom finish, symmetrical, asymmetrical or inside asymmetrical reflector, one or two-piece lens in clear or opaque, tube guard and 6 foot white or black power cord (all sold separately). Available for 24,39,54 and 80 watts (fixture length varies per lamp version.) Integral ballast. One 120 Volt T5HO mini bipin linear fluorescent lamp not included. General light distribution. UL and cUL Listed. Dimensions: 24 watt version is 22 1/2 inches long, 39 watt version is 34 1/4 inches long, 54 watt version is 46 1/16 inches long, 80 watt version is 57 15/16 inches long.



SHADE COLOR	White
BODY FINISH	Natural
WATTAGE	24W
DIMMER	Not Dimmable
DIMENSIONS	22.5"L x 1.375"W x 2"H
BULB NOT INCLUDED	
LAMP	1 x T5HO/T5 Bipin/24W/120V Fluorescent

SPEC # BAR22943

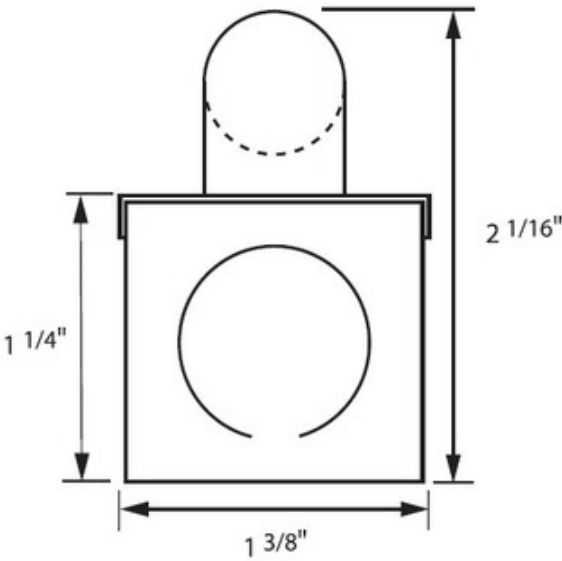

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE