



BRAND Beach Lighting


DESCRIPTION

R4-499AT 4 inch Non-IC Airtight New Construction Housing is designed for use in 12V low voltage applications. Non-IC designation requires that housing be a minimum of 3 inches away from insulation. Airtight feature prevents airflow between attic and living areas. Accomodates one 12 volt, GU5.3 MR16 halogen up to 50 watts (or LED equivalent), sold separately. Supplied with a low voltage magnetic transformer. Halogen dimmable with a low voltage magnetic dimmer. See LED bulb manufacturer for dimmer compatibility with a magnetic transformer when using LED equivalent. Ceiling cut out 4.25 inch. A complete fixture requires a housing and trim, sold separately.



Shown in: Galvanized Steel

TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	50W
DIMMER	Low Voltage Magnetic
DIMENSIONS	8"W x 5.5"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU5.3 (bipin)/50W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED
Technical Information	
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction NON IC Airtight
HOUSING HEIGHT	6"
SPEC #	BEA36980

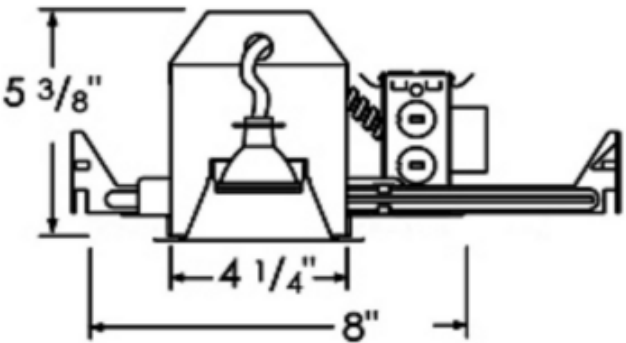

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE