



**BRAND**

Contrast Lighting

**DESCRIPTION**

IT3000CE 3.5 Inch Low Voltage Non-IC Shallow Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to a 7/8 inch ceiling thickness. Low voltage 12 volt electronic transformer included. One 35-37 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Wattage dependent on housing/trim combination. Dimmable with a low voltage electronic dimmer. See attached manufacturer dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 3 5/8 inch ceiling cut out. 11.6 inch length x 4.7 inch width x 3.7 inch height. A complete fixture includes a housing and trim, sold separately.





<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Galvanized Steel
<b>WATTAGE</b>	37W
<b>DIMMER</b>	Low Voltage Electronic
<b>DIMENSIONS</b>	11.6"L x 4.7"W x 3.7"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	MR16/GU5.3 (bipin)/37W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

*Technical Information*

<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	Remodel NON IC
<b>HOUSING HEIGHT</b>	4"
<b>APERTURE SIZE</b>	3.500"

**SPEC #** CLT3801

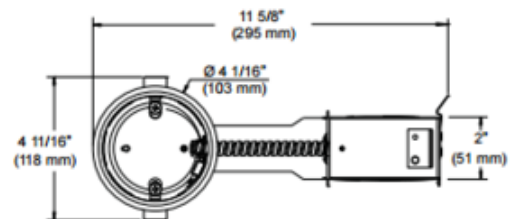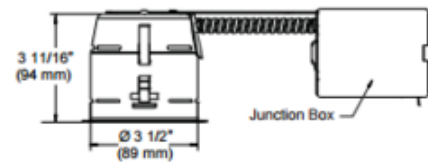

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE