



### DESIGNER

Gregory Kay

### BRAND

PureEdge Lighting

### DESCRIPTION

Aurora Halogen 2 Inch Square Aperture Bevel Trimless Downlight with Housing is a specification grade, recessed, adjustable accent fixture for plaster or drywall construction. Trim finish available in Black, White, Satin Aluminum or Satin Bronze. Dome features an anodized soft haze finish. The flush mounted rigid plaster plate, which is finished into the ceiling, maintains a flat finish and secures the removable flush beveled trim. The 3.5 inch square beveled trim raises the 2 inch aperture above the ceiling plane. Combining the Aurora dome with the tilt gear hidden behind the lamp creates a clean internal look. Flangeless, flush trim installs into the plaster plate with a precision snap-fit. Fixture offers hot aiming with 0 to 42 degree vertical adjustment and 362 degree horizontal rotation without beam clipping. Precision machined gear adjustment is concealed behind the lamp. Features self locking tilt and manual locking horizontal rotation. Includes machined aluminum snoot and die formed aluminum back shield to control internal spill light. The snoot carries the lamp and two optional light control accessories, sold separately. Includes a soft focus lens. Housing is made of die formed aluminum and includes one 12 volt 75 watt toroidal magnetic or electronic low voltage transformer. Housing is IC and Air-Tight, suitable for remodel or new construction. Dome hides electrical hardware and tilts for easy access to junction box and transformer. One 12 volt GU5.3 base MR16 up to 50 watts IR (infrared, equal to 75 watt halogen) is required, but not included. ETL listed for damp location, or wet location when used with glass lens accessory LWET. Optional Aurora Gear Cover, LWET accessory, and light control accessories sold separately.




TRIM COLOR	N/A
BODY FINISH	Satin Black
WATTAGE	50W
DIMMER	Low Voltage Magnetic
DIMENSIONS	15.75"L x 9.25"W x 5.25"H
BULB INCLUDED	
LAMP	1 x MR16/GU5.3 (bipin)/50W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

### Technical Information

FUNCTION	Adjustable Accent
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	6"
APERTURE SHAPE	Square

SPEC #	EDG46305
--------	----------

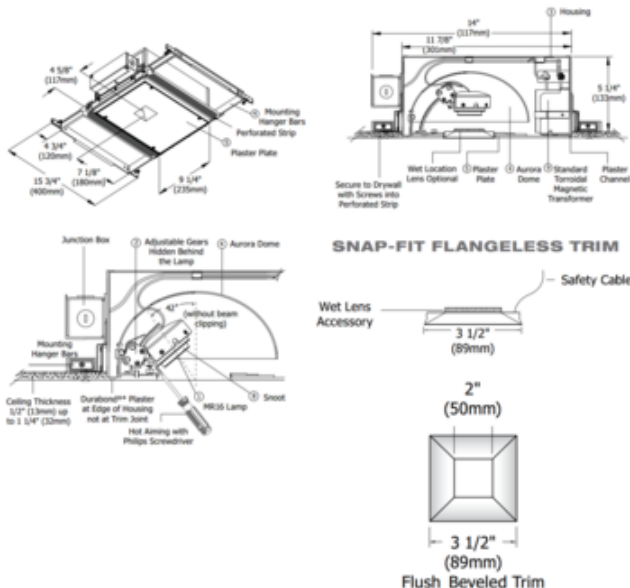

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE