




BRAND

PureEdge Lighting

DESCRIPTION

Soft Line LED System for Indirect Lighting uses RGB to provide soft, ambient, indirect illumination for decorative and architectural applications. For compact shipment and storage, Soft Line coils like a retractable tape measure. When uncoiled, the Soft Line becomes a 1.25 inch wide cupped, rigid aluminum channel that can be mounted on any angle between opposing wall, ceiling or floor surfaces. Soft Line is field-cuttable. Max length 16 feet before re-feeding at both ends. SLD-RGB features a double row of 24 volt Soft Strip in Red, Green & Blue colors. SLD-RGB kit includes Soft Line channel, a pair of power feed and non-power feed turnbuckles and a double row of RGB LED Soft Strip. Soft Line 24 inch standoff, sold separately. Turnbuckles support Soft Line on any angle from 0-60 degrees, feed power from one end and mount to a standard 4 inch square electrical box with round plaster ring. Turnbuckles may be reversed and mounted (opposite the power feed) to a ceiling, wall or floor. System is powered by a remote RGB Power Supply with DMX Driver. CDMX1-RGBW, CDP and CTP Controller options send commands to RGB drivers for color changing Soft Strip. Power supply, standoff, and controller sold separately.

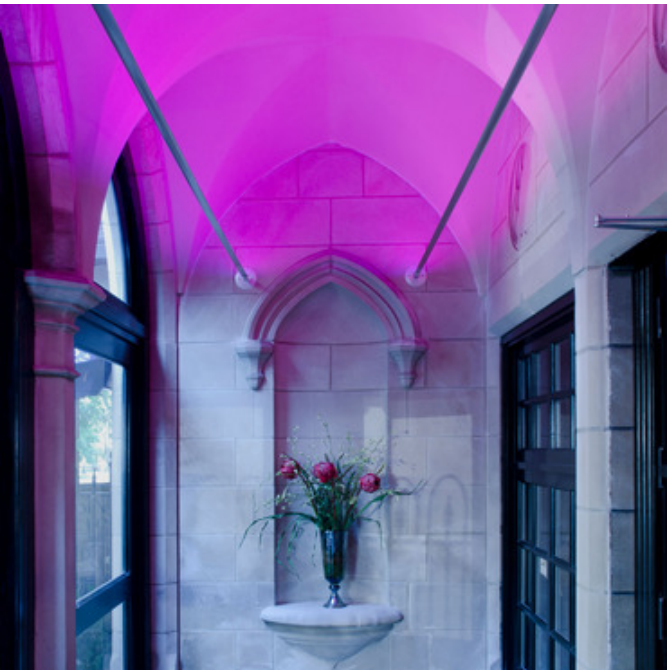

SHADE COLOR

N/A

BODY FINISH

Satin Aluminum

WATTAGE

52W

DIMMER

Dimmable

DIMENSIONS

120"L x 1.25"W x 1.5"H

INTEGRATED LED MODULE

LAMP

10 x LED/24V LED

Technical Information

LAMP LIFE

50000 hours

SPEC #

EDG69738

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE