Lightology

Cirrus Ceiling Wall Wash w/Left Remote Power Feed

SPEC #

DESIGNER	Gregory Kay
BRAND	PureEdge Lighting

DESCRIPTION


Cirrus Channel Ceiling Wall Wash with Left Feed is available in two wattage options, a variety of finishes, and a spectrum of color temperature options. Available in 12 inch increments up to 144 inches (12 feet) for 7 watt option and 120 inches (10 feet) for 10 watt option Fixture mounts 24 inches from wall. Includes a 4.6 inch square split canopy that mounts on a standard junction box, an 8 foot whip, and a left feed. May be ordered with a Slim Profile Channel Junction Box (C-IRE-JBOX), sold separately. Mounting clips (C-MCL) are provided every 18 inches. Cirrus Wall Wash can be powered with Universal (UNI), electronic low voltage (ELV), 0-10V, or Lutron Hi-Lume power supply up to 100 watts at a maximum of 40 feet away, sold separately. See attached manufacturer spec for dimmer compatibility. ETL listed. Title 24 when used with Universal driver. Includes a 5 year warranty. Required power supply, optional mounting accessories, and dimmer control, sold separately. Product is built to order.

N/A Satin Aluminum 7W Dimmable 12"L x 0.9"W x 0.96"H 1 x LED/7W/24V LED 278 lumens 39.71
7W Dimmable 12"L x 0.9"W x 0.96"H 1 x LED/7W/24V LED 278 lumens
Dimmable 12"L x 0.9"W x 0.96"H 1 x LED/7W/24V LED 278 lumens
12"L x 0.9"W x 0.96"H 1 x LED/7W/24V LED 278 lumens
1 x LED/7W/24V LED 278 lumens
278 lumens
278 lumens
39.71
55.71
2700K
95 CRI
EDG98827



EDG98827

JA8

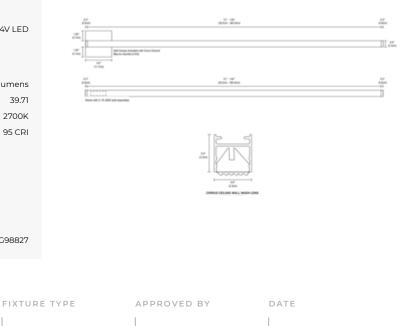

PROJECT

COMPANY