


BUBBLE BALL 14 LIGHT, LINEAR CANOPY

SUSPENSION



Compatible System Connectors

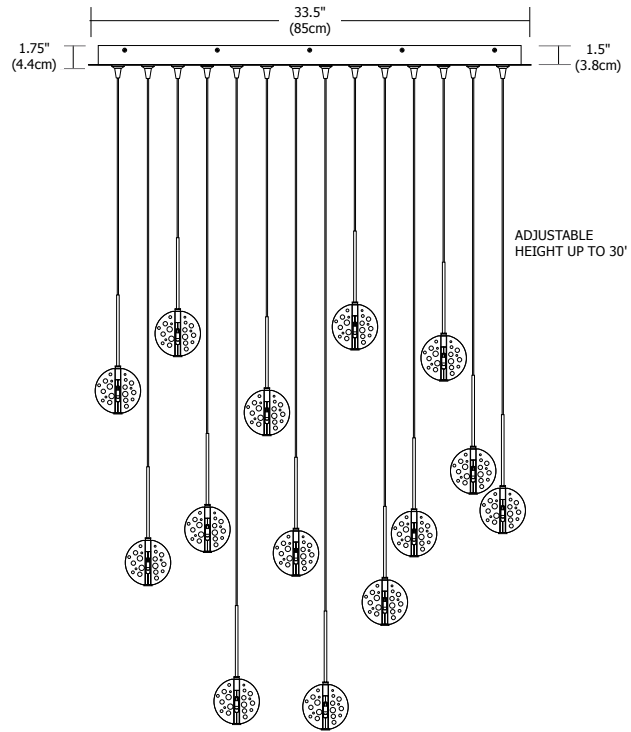

Blue



Amber



Red

Description

The 14-Port, 33" Rectangle Fast Jack Canopy mounts to a standard 4" electrical box with plaster ring, or to an octagon box. It includes 4 drywall anchors for additional support. Dimmable with standard electronic dimmer. Maximum 20 watt load per port – total of 280 watts. General light distribution.

Bubble Ball pendants suspend from fourteen individual canopy ports; each ball features bubble glass with a 20 watt, 12 volt, T3, G4 halogen lamp. Bubble Ball 14-Port is available with 10, 20 or 30 ft long field-cutable coaxial cable and includes (14) FJ-MCH (male connector heavy-duty). Order fixture based on longest desired cable length.

Finish

Satin Nickel

Lamp Specification (per port)

Maximum 20 watt G4 bi-pin halogen (included) - 12 volt

Weight

65 lb (29.5kg)

Canopy	Port	Shade Type	Cable Length	Finish	Voltage
33RE 11"x33" Rectangle	14 14 Port	BBCL Bubble Ball Clear BBBL Bubble Ball Blue BBAM Bubble Ball Amber BBRD Bubble Ball Red	10FT 10 ft. 20FT 20 ft. 30FT 30 ft.	SN Satin Nickel	Standard 120V (leave blank) 2 230V 50Hz 3 277V 60Hz

PROJECT:

FIXTURE TYPE:

DATE: