


## Installation Instructions for **Twin Slim LED**


### IMPORTANT INFORMATION

- This product is wall mounted only.
- Supply power to mirror in accordance with local electrical codes.
- This instruction shows a typical installation
- This product is dimmable with ELV dimmers.

**SAVE THESE INSTRUCTIONS!**

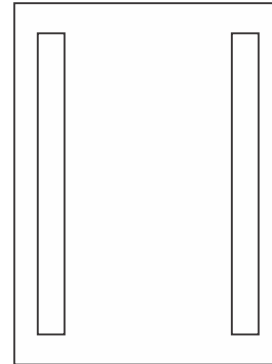


## Install the Mounting Plate

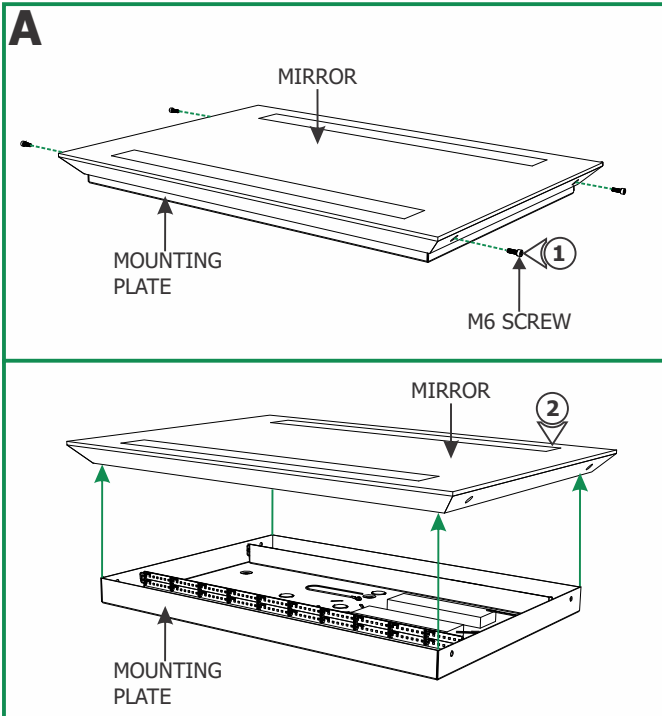

**NOTE:** It is recommended that one person holds the mounting plate while the electrician installs it.

**1:** Loosen and remove the four M6 screws on the top and bottom of the mounting plate with the 3mm Allen wrench.

**2:** Pull the mounting plate completely out of the mirror.

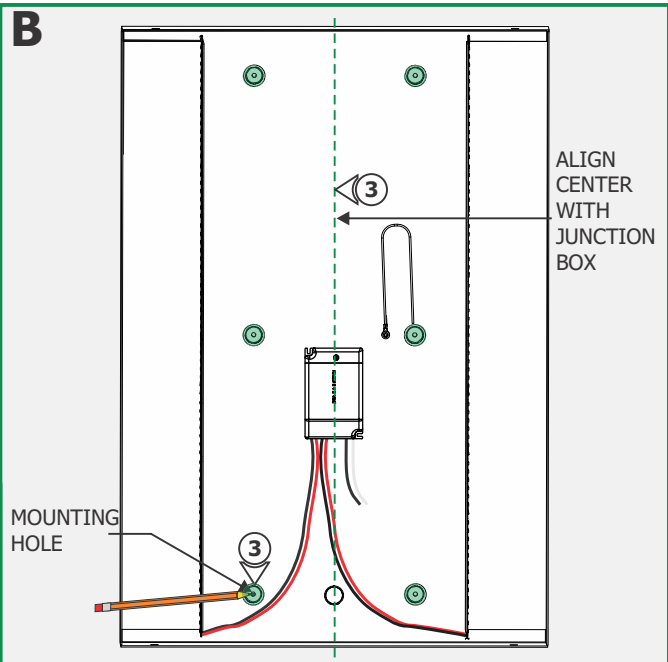



**3:** Align the mounting plate hole with the power line conduit, or junction box. Use the mounting plate as a template to mark eight mounting holes (highlighted in GREEN) onto the wall.

**NOTE:** Make sure that the mounting plate is leveled horizontally.

**4:** Tap the anchors onto the marked points up to the threaded portion with a hammer.

**5:** Screw in the threaded portion of the anchors with a Phillips screwdriver.

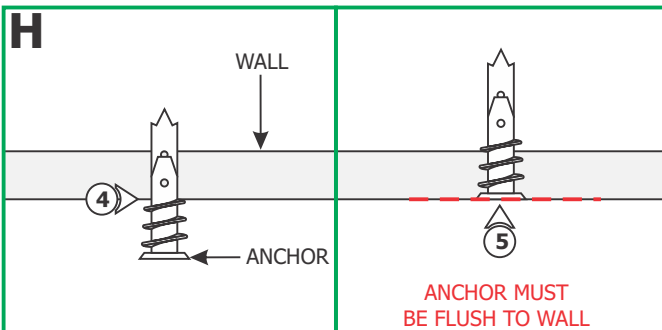

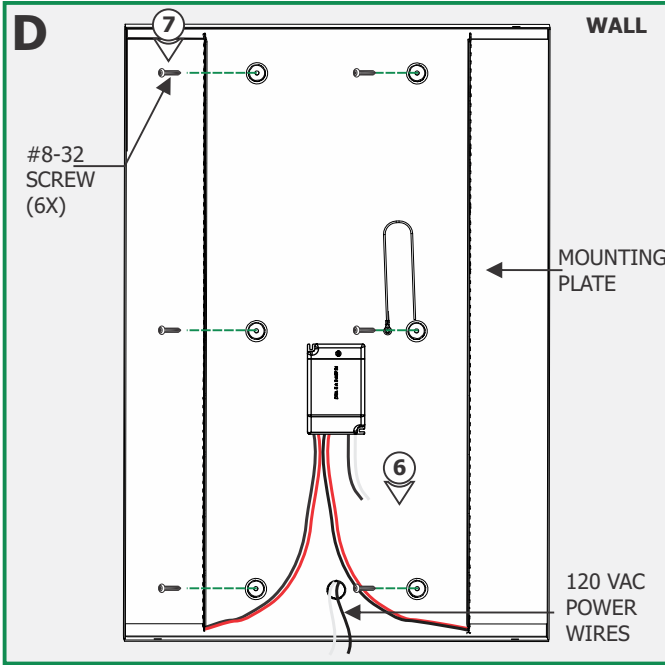


**6:** Feed the 120 VAC power wires through the mounting plate.

**7:** Line up the mounting plate holes with the anchors and secure it with the eight #8-32 screws provided.


**8:** Ensure the mounting plate is grounded in accordance with local electrical codes.

**NOTE:** Contains integrated 24V LED lights consuming a total of 40 Watts.

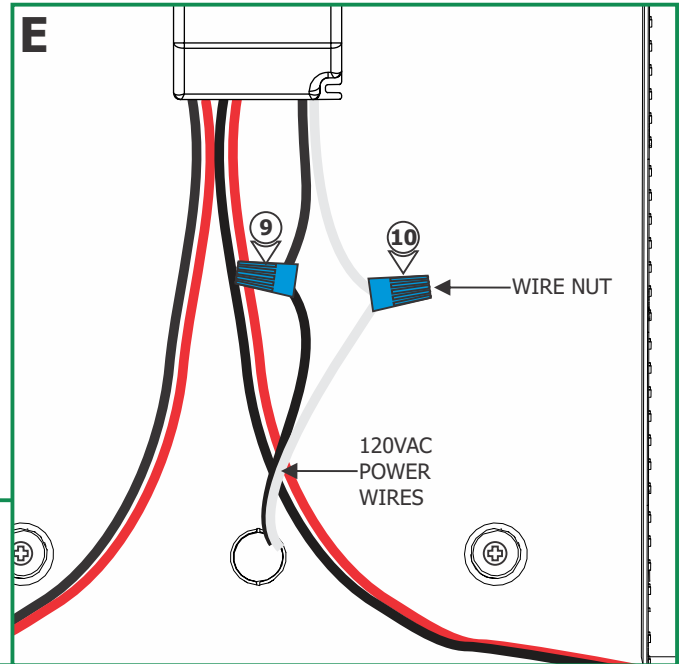

**9:** Connect the 120VAC hot wire to the hot transformer wire using a wire nut.

**10:** Connect the 120VAC neutral wire to the neutral transformer wire using a wire nut.

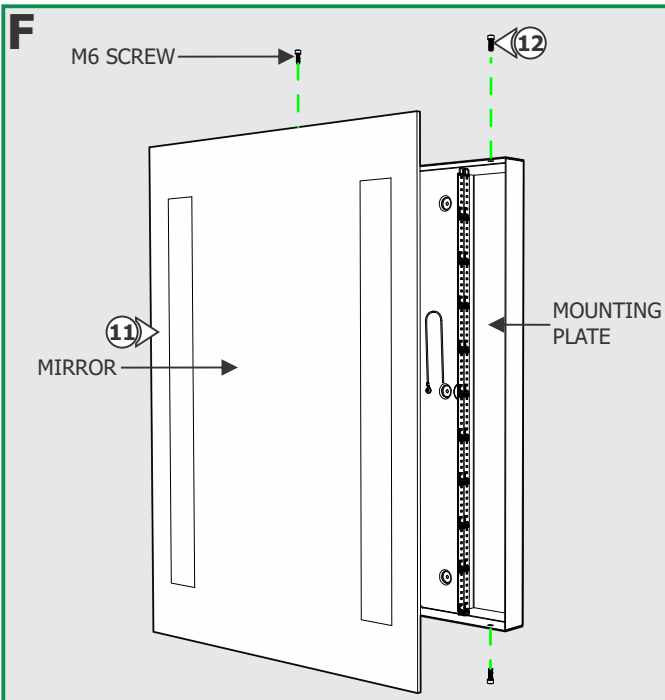

**11:** Carefully place the mirror onto the mounting plate.

**12:** Secure the mirror to the mounting place by tightening four M6 screws using a 3mm Allen wrench.