1.0





## GENERAL PRODUCT INFORMATION:



This product is suitable for damp locations.

This instruction shows a typical installation.




## CAUTION-RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and DISCONNECT POWER TO THE ELECTRICAL BOX.

NOTE: Assistance will be need to install this fixture.

## Installing the Fixture


with local electrical codes.

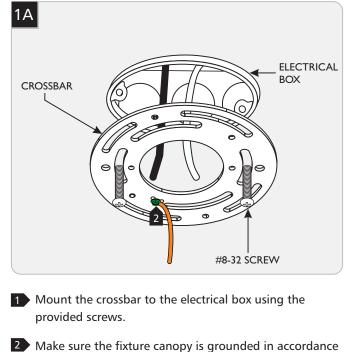


THUMB SCREW

3 Feed the electrical wires through the canopy post


Mount the fixture canopy to the electrical box with the two thumb screws.

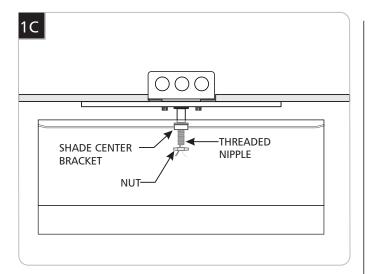


5 Insert the shade onto the threaded nipple through the shade center bracket. While holding the shade in place, screw in a nut and secure the shade by completely tightening the nut.

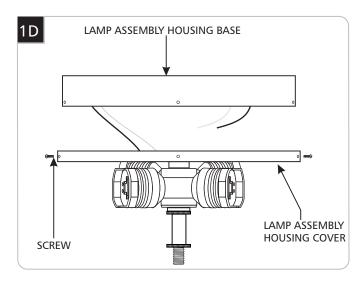

6 Detach the lamp assembly cover from the base by loosening and removing the four screws.

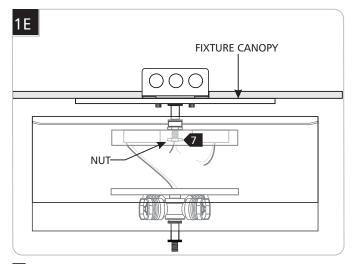


**7** Install the housing base to the threaded nipple and secure it by screwing on a nut and completely tightening it .



8 Connect the fixture white wire to the neutral power line wire with a wire nut.

- 9 Connect the fixture black wire to the hot power line wire with a wire nut.
- D Place all wires and wire nut connections inside the lamp assembly housing and re-install it. (Reversal of step 1D)

## Installing the Lamps & Glass Disk

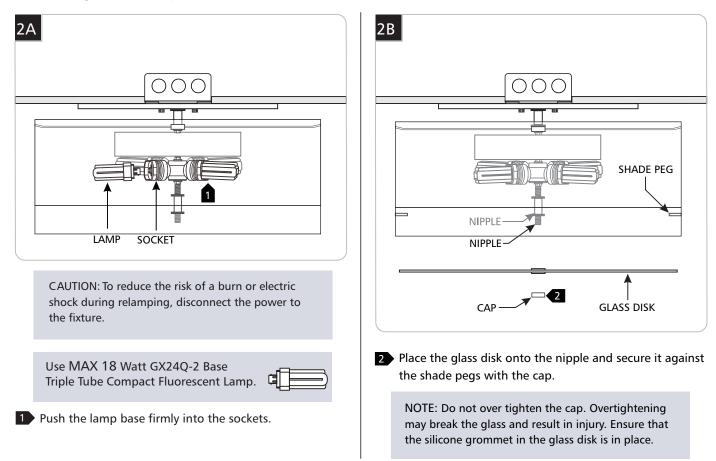

SAVE THESE INSTRUCTIONS!

