



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Millwork Light Channel features 24 volt Soft Strip inside a slim, paintable aluminum extrusion that recesses into wood, minimum .75 inches thick. Finish available in Satin Aluminum, Antique Bronze or White. Custom finishes available. LCMWC uses SS2C with choice of 2700K Very Warm White with Clear (CVW) or White (DVW) lens, or 3000K Warm White with Clear (CWW) or White (DWW) lens, 95+ CRI LEDs, with 43 lumens per watt/126 lumens per foot. 50,000 hour average lamp life. The 61 degree White diffuser lens projects a clean line of light and eliminates LED dots, while the Clear lens provides maximum light levels. System consumes 2.5 watts per foot and is sold in 3, 5, 8, 10 and 12 inch increments up to 120 inches. Fixture includes end caps and 4 mounting spring clips per foot and can be linked with plug-in flexible connectors for a maximum of 40 feet. Can be powered with an electronic low voltage or 0-10 power supply. 0-10 power supplies include a PSB-96W-010-24VDC, PSB-2X96W-010-24VDC, PSB-3X96W-010-24VDC or PSB-4X96W-010-24VDC, dimmable with a 0-10 dimmer (tested and approved Philips Sunrise SR1200ZTUNV). Low voltage electronic power supplies include a PSB-60W-ELV-24VDC, PSB-100-ELV-24VDC, PSB-2X100-ELV-24VDC, PSB-3X100W-ELV-24VDC or PSB-4X100W-ELV-24VDC, dimmable with a low voltage electronic dimmer (tested and approved Legrand Adorne ADTP703TU, Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600, or Lutron Radio RA). Fixture includes a 5 year warranty. Major components made and assembled in the USA. For use in indoor task lighting, under/above cabinet, cove, retail, and closet applications. ETL listed for dry location for closet use with clothing and complies with UL Standard 2108. Required power supply, dimmer and optional mounting accessories, sold separately.




| | |
|------------------------------|------------------------------|
| SHADE COLOR | White |
| BODY FINISH | Satin Aluminum |
| WATTAGE | 1W |
| DIMMER | Dimmable |
| DIMENSIONS | 3"L x 1.25"W x 0.7"H x 0.8"D |
| INTEGRATED LED MODULE | |
| LAMP | LED/1W/24V LED |

Technical Information

| | |
|------------------------|-----------|
| LUMINOUS FLUX | 43 lumens |
| LUMENS/WATT | 43.00 |
| LAMP COLOR | 2700K |
| COLOR RENDERING | 95 CRI |

SPEC # EDG123816

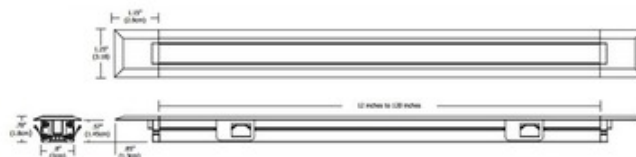

| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
|---------|---------|--------------|-------------|------|
| | | | | |